

Tumble dryer

T5130-LAB

Features and benefits

- Professional dryer which meets ISO6330 standard
- Durable mechanical construction, designed for professional use
- Dedicated drying programs for standard + additional programs for normal bulk drying
- Stainless steel front & Stainless steel drum
- Accurate control of exhaust air temperature
- High heating power meaning quick drying
- Combine with FOM71CLS reference washer for a complete testing solution
- **Compass Pro[®] microprocessor offers:**
 - Large display and one control knob for easy program selection
 - Language selection
 - Service program for adjustment of parameters
 - USB connection
- Residual Moisture Control for an accurate drying result and a low energy consumption
- Reversing drum for less tangling of large items
- Reversible door hanging for a convenient laundry flow
- Easy access to vital parts for simple servicing from the top and rear



Images shown are a representation of the product only and variations may occur.


Main specifications			T5130-LAB
Rated capacity,	filling factor 1:22	kg/lb	6/13
Drum volume		litre	130
Drum diameter		mm	575
Heating alternatives			
electric		kW	3.2
Consumption data*			
Total time full load		min	54
Energy consumption full load		kWh	2.95
Evaporation		g/min	56
Energy kWh/litre water evaporated		kWh/l	0.98
* At rated capacity 100% cotton load at 50% initial moisture dried to 0%. Consumption data based on bulk drying.			

Electrical connections*					
Heating alternative	Main voltage		Heating power kW	Total power kW	Recommended fuse A
		Hz			
Electric heated	220-230V 1 -	50/60	3.1	3.3	16
	240V 1 -	50/60	3.2	3.5	16
	380-400V 3 -	50/60	3.1	3.3	10
	415V 3 -	50/60	3.2	3.5	10


Connections		T5130-LAB
Air outlet	mm	∅ 100
Maximum air flow	m ³ /h	150
Condensate		-
Maximum static back pressure	Pa	80
Sound levels		
Airborne sound level	dB(A)	<70
Heat emission		
% of installed power, max		15
Shipping data**		
Shipping volume	net, kg m ³	58 0.51
Accessories		
Stacking frame for mounting T5130 on top of W555H		x
Stainless steel base frame		x
Dimensions in mm		
A Width		597
B Depth		725
C Height		839
D		138
E		50
F		89
G		200
1 Operating panel		
2 Door opening ∅ 370 mm		
3 Electrical connection		
4 Exhaust connection		

* Other voltages available, see installation manual.


** Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

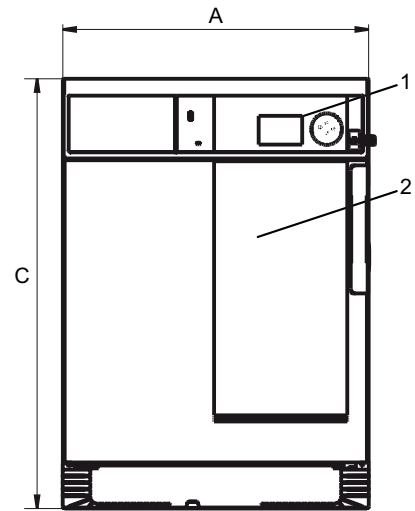

Front

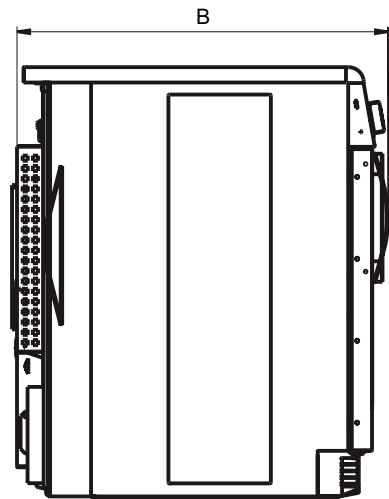

Left side

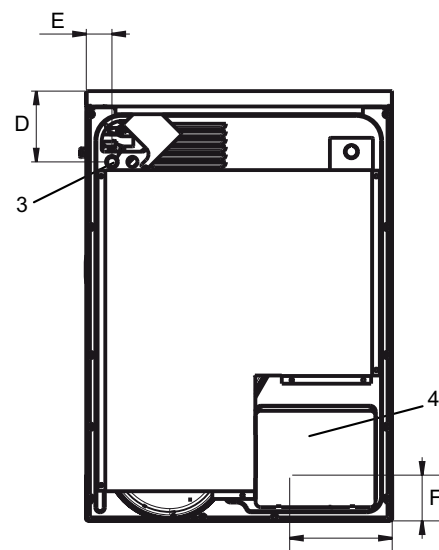

Rear side