



## ColorTouch® PC

### ColorTouch® PC

The ColorTouch® PC is designed to meet the same ISO standards as all ColorTouch® instruments, while providing you the convenience of simple operator interfaces through Windows™ based software. Capable of measuring ISO Brightness, Color, Color Difference, Fluorescence and Opacity. The ColorTouch® PC provides you a powerful tool to manage your optical properties.

The ColorTouch® PC is driven by a powerful software package that provides the operator or management the ultimate flexibility to develop and design specific operational presentations which are exactly what their testing requires. The Designer function of the software will allow for the creation of measurement presentations and functions. Additionally, the ColorTouch® PC provides extensive capabilities for analyzing data from several different measurements and evaluating historical trends.

## Technidyne ColorTouch® PC:

When making decisions on whether a product meets customer specifications, the need to have all the data to evaluate the product is necessary. The ColorTouch® PC provides capabilities far beyond color evaluation.

### Designed to be your QC instrument measuring:

- ISO Brightness
- Whiteness/Tint/Yellowness
- Color Space
- Color Difference
- Fluorescent Component of Brightness, Color and Whiteness
- Opacity

### Meeting ISO and other industry standards

- Diffuse Illumination / 0° Viewing d/0° Geometry ISO 2469, 2470, 2471, 5631, 9416, 11475, 11476, 22754, 22891, TAPPI T 519,525, 527, 560


### Features

- One touch operation
- Presentation Designer to build test sequences for your application
- Optional Aperture Configurations Available
- Automated Calibration w/Swing-In “working” standard
- Exact conformance to ISO standards

	UVIN	UVEX	Delta Comp.
L*	93.83	93.49	0.34
a*	-3.4	-3.34	-0.06
b*	-4.54	-2.72	-1.82
Brightness	92.93	88.96	3.97
WI CIE	105.68	96.56	9.13

	UVIN	UVEX	Delta Comp.
L*	94.19	93.49	0.7
a*	-2.96	-3.34	0.38
b*	-7.25	-2.72	-4.53
Brightness	97.79	88.96	8.84
WI CIE	118.78	96.56	22.22

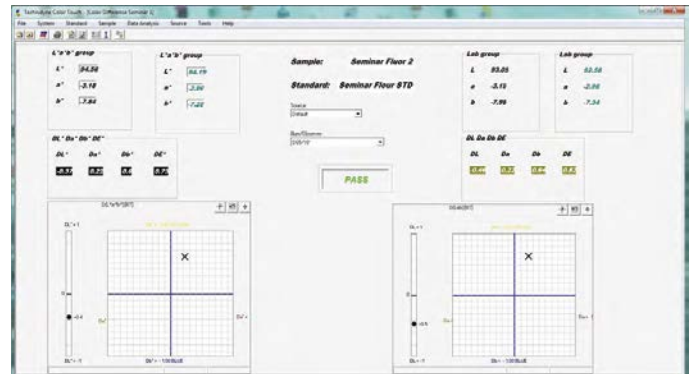

## Technical Specification:

### Industry Standardization Paper/Tissue/Board

<b>ISO Standards</b>	2469, 2470, 2471, 11475, 11476, 12625, 5631, 3688
<b>TAPPI Standards</b>	T519, T525, T527, T534, T560
<b>Sample Types</b>	<ul style="list-style-type: none"> <li>• Letter</li> <li>• A4 Sheets</li> <li>• Sheeted Materials</li> <li>• Handsheets</li> <li>• Tissue</li> <li>• Towels</li> <li>• Powder/Minerals (pressed pellet)</li> </ul>
<b>Sample Thickness Range</b>	0 to 40,000µm
<b>Geometry</b>	Dual Beam d/0°
<b>Specimen Area Measured</b>	28 +/- 3mm
<b>w/Optional Apertures</b>	15mm & 7.5mm
<b>Specimen Aperture</b>	34 +/- 0.5mm
<b>Optional Apertures</b>	15.8mm & 7.8mm
<b>Light Source</b>	Pulsed Xenon
<b>Lamp Life</b> (# of measurements)	+500,000
<b>Detector</b>	Scanning Silicone Diode Array
<b>Spectrometer Range</b>	400 to 700nm
<b>Bandpass</b>	10nm
<b>Calibration</b>	Traceable to NRC
<b>Measurement Range</b>	0-200% (Reflectance)
<b>UV Sources</b>	D65, C, UV-EX, UV1*, UV2*
<b>Automatic UV Control</b>	Auto-adjustment to calibrated sources
<b>UV Filters</b>	UV Trim 395nm/ UV Cut-off 420nm

\*User Defined

\*\*When using Technidyne Laboratory Calibration Standards

<b>Observers</b>	CIE 2°, 10°
<b>Illuminants</b>	C, D65, A, B, D50, D55, D75, F2, F7, F11
<b>Photometric Nonlinearity</b>	0.1%
<b>Repeatability</b> (White tile avg. 20 readings)	< 0.01 CIELAB DE
<b>Reproducibility</b> (Interinstrument)	<0.20 CIELAB DE
<b>Automated</b> (Quick Cal)	Yes (Internal Working Standard)
<b>Automated Calibration</b> (Primary)	Yes** (Auto Data Entry via USB)
<b>Measurement Time</b>	4 to 10 seconds (measurement dependent)
<b>Measurement Results</b>	<ul style="list-style-type: none"> <li>• Brightness (ISO)</li> <li>• Opacity</li> <li>• Whiteness (CIE, Hunter, ASTM, Hunter, Berger, Stephensen, Stensby)</li> <li>• Yellowness (ASTM Hunter)</li> <li>• Tint (CIE, Hunter)</li> <li>• Color (XYZ/Rx,Ry,Rz/ L,a,b/ L*,a*,b* /L*,C*,h/ DWL,PUR,x,y,Y)</li> <li>• Color Difference</li> <li>• Fluorescence</li> <li>• Metamarism</li> <li>• Spectral Data – Wavelengths 400 to 700nm</li> </ul>
<b>Reflectance Intervals</b>	1nm, 5nm, 10nm, 20nm
<b>Statistics</b>	<ul style="list-style-type: none"> <li>• Average</li> <li>• Maximum Test Value</li> <li>• Minimum Test Value</li> <li>• Standard Deviation</li> </ul>
<b>Data Results Database</b>	Yes

<b>Data Views</b>	<ul style="list-style-type: none"> <li>• Tabular</li> <li>• Color Space Plots</li> <li>• Spectral Curves</li> </ul>
<b>Pass/Fail Alerts</b>	Yes (User Defined Specifications)
<b>Stored Standards</b>	Yes
<b>Data Tolerancing</b>	Yes
<b>Data Communications /Ports</b>	<ul style="list-style-type: none"> <li>• CSV</li> <li>• Serial</li> <li>• USB</li> <li>• Ethernet</li> <li>• RS232</li> </ul>
<b>Presentation Designer</b>	Yes (Drag and Drop Presentation Builder)
<b>User Interface</b>	<ul style="list-style-type: none"> <li>• ColorTouch® PC</li> <li>• Windows Software (Windows Compatible Software)</li> </ul>
<b>Recommended Operating Temp.</b>	10-32° Celsius (50-90° F)
<b>Power Consumption</b>	200 watt max / 80 watts passive
<b>Voltage/Frequency Requirement</b>	100-250VAC / 48-61 Hz

### Weights & Dimensions

<b>Depth</b>	35.6 cm (14 in.)
<b>Width</b>	27.9 cm (11 in.)
<b>Height</b>	43.2 cm (17 in.)
<b>Weight</b>	15.4 kg (34 lbs)
<b>Country of Origin</b>	U.S.A.

### Contact Details

**web.** [www.industrialphysics.com](http://www.industrialphysics.com)

**email.** [info@industrialphysics.com](mailto:info@industrialphysics.com)

**email.** [info.china@industrialphysics.com](mailto:info.china@industrialphysics.com)